

Code	48SDZX230A1
Family	ZX2 VORTEX
Group	Dirty water drainage
Typology	Submersible

Extra UE Only	No
Uses	Civil
	Household

Application limits

Liquid Type	Dirty Water
Minimum liquid temperature	0 °C
Maximum liquid temperature	40 °C
Maximum Chlorine Content	- ppm
Maximum Sand Content	- ppm
Manometric suction lift	0 m
Maximum immersion depth	5.00 m
Maximum Ambient Temperature	- °C
Minimum Ambient Temperature	- °C
Maximum Working Pressure	- bar

Construction and safety standards

The pumps are complete with:

- 5 m long power cable
- external float switch
- hose connection 50 mm
- EN 60335-1, IEC 60335-1
- EN 60034-1, IEC 60034-1

Connections

Type of connection	Gas threaded
Size of suction connection	-
Size of delivery connection	1 1/2"

Duty Point

Flow rate (actual)	0.000 l/min
Head (actual)	0.000 m

Input Data

Rated flow rate (requested)	0.000 l/min
Rated head (requested)	0.000 m
System geodetic head	0.000 m
System friction losses	0.000 m
NPSH Available	0.000 m
Liquid	Water
Temperature	20 °C
Density	998.1 kg/m³
Kinematic Viscosity	1.00 mm²/s
Vapour Pressure	2,318 Pa

Pump nameplate data

Flow rate	25 - 320 l/min
Head	12.5 - 2 m
Maximum head	13.1 m
Minimum head	2 m
Minimum Efficiency Index	-


Other Pump Data

Max Sound Pressure Level (1 m)	- dBA
Horizontal installation	No
Solids free passage	30.00 mm

Motor nameplate data

Voltage	220-240 V
Phases	1
Frequency	50 Hz
Rotation Speed	2900 rpm
Rated output power	0.55 kW
Rated Current	4 A
Input power P1	0.88 kW
Efficiency grade	Undefined
Capacitor	20 µF
Capacitor Voltage	450 V
Insulation Class	F
Enclosure class IP	X8

Performance

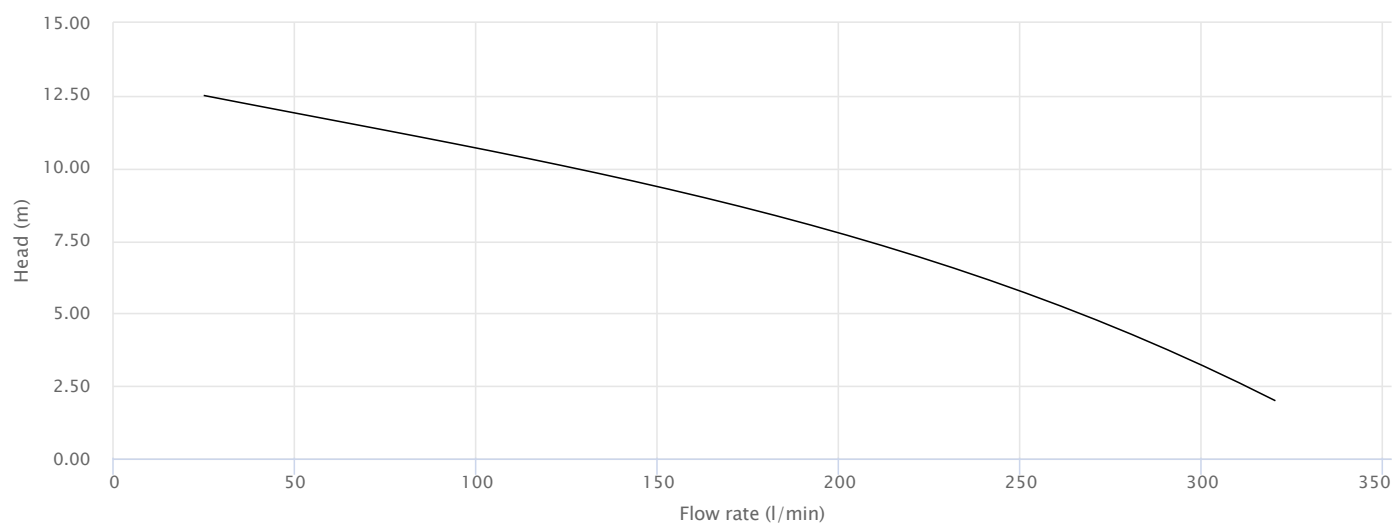


Construction

Bearings

Motor bearing - pump side	6203 ZZ
Motor bearing - opposite side	6203 ZZ

Shaft Seal

Seal Type	Double mechanical seal in an oil chamber
Diameter MS	14
Stationary Ring MS	Silicon Carbide
Rotating Ring MS	Graphite
Elastomer MS	NBR
Pump Side Model	MG1-14D SIC
Diameter PS	14
Stationary Ring PS	Silicon Carbide
Rotating Ring PS	Silicon Carbide
Elastomer PS	NBR

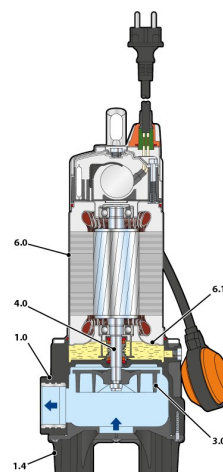

Materials

1.0 - Pump casing	Reinforced technopolymer
1.4 - Base	Stainless steel EN 1.4301 (AISI 304)
3.0 - Impeller	Reinforced technopolymer
4.0 - Pump Shaft	Stainless steel EN 1.4057 (AISI 431)
6.0 - Motor casing	Stainless steel EN 1.4301 (AISI 304)
6.1 - Motor Cover	Stainless steel EN 1.4301 (AISI 304)

Dimensions

DN2	a	b	c	d	h	h1	p	x	Kg
	[mm]								
1 1/2"	90	81	118	50	413	73	500	500	10.3

